SOUTH KING FIRE STATION 63 VANITIES (SUPPLY ONLY)
33414 21ST AVE SW
FEDERAL WAY, WA 98003

CHANGE ORDER:

REVISION:

CASEWORK GRADE REQUIREMENTS:
INSTALL GRADE REQUIREMENTS:

DESIGN FIRM:

CONTRACTOR FIRM:
OWNER DIRECT

INSTALLATION FIRM:

ARCHITECT STAMP:

CONTRACTOR STAMP:

PROJECT GENERAL NOTES:

DESIGN MODIFICATIONS HAVE BEEN MADE TO THE ARCHITECTURAL DRAWINGS. ACCEPTANCE OF THIS DOCUMENT CONSTITUTES ACCESPTANCE OF ALL DESIGN MODIFICATIONS AND/OR ANY ADJUSTMENTS MADE BY THE DESIGN TEAM.

SITE CONDITION REQUIREMENTS:

AS STATED IN AWS 2ND EDITION, PER SECTION 2, 4.4.3.4, ARCHITECTURAL WOODWORK SHALL BE STORED AND/OR INSTALLED IN AN AREA THAT IS CLEAN, DRY, PROTECTED FROM SUNLIGHT, EXCESSIVE HEAT, MOISTURE, ROOM TEMPERATURE BETWEEN 60° - 90° FAHRENHEIT AND HAS A RELATIVE HUMIDITY BETWEEN 25%-55%. SECTION 2, 4.4.6.1 STATES IMPROPER RELATIVE HUMIDITY EXPOSURE DURING SITE STORAGE AND INSTALLATION RESTS WITH THE CONTRACTOR.

SUBMITTAL:

PROJECT:

[redacted]

PROJECT GENERAL NOTES

Architect and General Contractor: Refer to shops for "Q" question locations.
These questions must be answered prior to production

Q1-	Please Provide Corian Solid Surface Color	Q3-	Please verify all PLAM color placements
Q2-	Please send a sink schedule (with cut-sheets) so that we can coordinate sizes with our casework *		
	* If the "Sink" sizes are not provided within 30-days of 1st delivery date, then all casework will be fabricated as dimensioned on our shop drawings (after field dimensions are taken of course).		

PROJECT HARDWARE

FOR PRODUCT DATA SEE "H" SHEET	CABINET HARDWARE		SPEC SECTION	HARDWARE NOTES
H1	Hinge type & finish:	5-Knuckle	To match a previous project	
	Finish of hinges:	US26D "Brushed Chrome"		
H2	Pull type & size:	Wire - 96mm o.c. (4" overall)	To match a previous project	
	Finish of pulls:	US26D "Brushed Chrome"		
	Door pull placement:	Vertical		
H3	Magnetic catch @ door:	Epco. #592 (Aluminum)	To match a previous project	

South King Station 63 vanities

13873

[redacted]

PROJECT SPECIFICATIONS and COLORS

Project # 13873

Ship Date: 11/13/24

South King Station 63 vanities

Engineer:

Box count per Cutlist: Cutlist #:

Date:

Jobs ID#:

Tracking:

CABINET INFORMATION

	Standards as cited by Spec.	Fabrication Grade:	AWI Custom
	Arch, Wood Standards	Installation Grade:	AWI Custom
Specification Sections:	reference 13023		
Construction method:	Reveal Overlay	Exp. Vert. cab surfaces	HPDL (VGS)
Quantity of Boxes:	4	Semi-exposed material:	White melamine
Finish of Back Side of Doors:	Liner to match interior	Joinery:	8mm dowel
		Nailers required:	No

TOPS & BACKSPLASH

	Solid surface
Top thickness:	1/2" thick
Front Edge Style:	Built up to 1 1/2" w/ 1/8" Radius
Core Material:	Mill Option Subtop
Backsplash Type:	1/2" Top Set
Overhang info:	1/2" to face of door
	1" at finished end

NOTES

STANDARD DOOR CABINETS

Core material:	Particle board		
Grainmatch door & drawer fronts:	Not required		
Door Front material:	3/4" HPDL faced	Banding:	3mm PVC
Cabinet top material:	3/4" Melamine faced	Banding:	3mm PVC
Cabinet bottom material:	3/4" Melamine faced	Banding:	3mm PVC
Cabinet end material:	3/4" Melamine faced	Banding:	3mm PVC
Cabinet back material:	1/2" Melamine faced		
Toe Kicks: Core | Finish | Height	Separate particle board	Raw	4"

Other Finish Schedule

ID	Manufacturer/Material	Color #	Color Name	Thickness	Finish
SS01	TBD			1/2"	Matte

OWNER: PLEASE PROVIDE SOLID SUFACE COLOR. TO FIND COLORS AVAILABLE LOOK ON CORIANS WEBSITE

Sparkling Granita

Std PLAM Manufacturers:	Specification reviewed by:	Shanah Thomas	9/27/24
Wilsonart	Updated by:		
Nevamar	Updated by:		
Formica	Updated by:		
Pionite	Updated by:		
	PLAM colors located:	To Match Previous Project	

Colors	Grained	Manufacturer	Color #	Color Name
PL01		Pionite	A0101-SO	Pearl of the Orient
MM 1			-	White melamine

Includes: Doors, Drawer & False Fronts; Fixed Panels

Banding Type	Banding Color #	Banding Color Name
3mm PVC	P1AG601	Pearl of the Orient
-	-	-

Includes: Case Body Parts

Banding Type	Banding Color #	Banding Color Name
0	PTAG601	Pearl of the Orient
-	-	-

[redacted]

5 KNUCKLE HINGE
W/ REVEAL OVERLAY

BHMA COMPLIANT

COMPLIANT WITH ANSI/BHMA
A156.9 - GRADE 1


E.B. BRADLEY CO.
Specialty Hardware & Surfacing Products


PAGE: HI
DRW:
CHK:
SCALE:
REV:


HARDWARE
GENOTHEN STANDARD
5-KNUCKLE 32mm OVERLAY HINGE

E.B. BRADLEY - 5 KNUCKLE HINGE WITH REVEAL OVERLAY


- 32MM OVERLAY HINGE
- 2 3/4" FIVE KNUCKLE HINGE
- CHROME PLATED-US26D
- .095" STEEL
- HOSPITAL TIPS
- DESIGNED FOR 32MM HOLE SYSTEM
- MEETS AND EXCEEDS BHMA 156.9 GRADE 1
- 270 DEGREE SWING

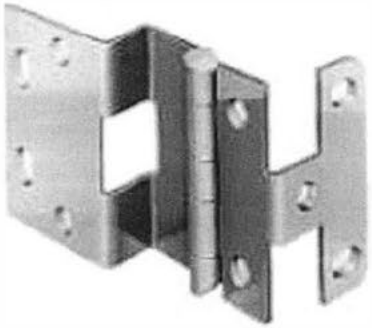

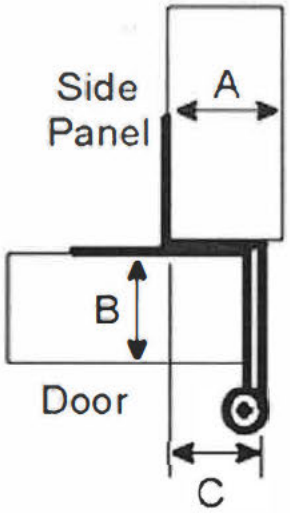

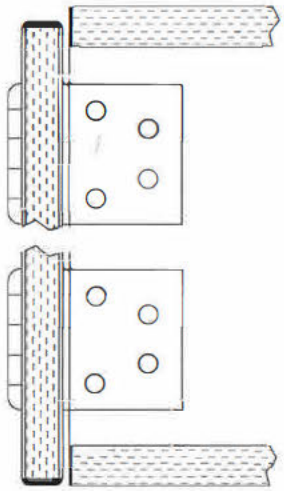

HINGED DOOR ALLOWS
270 DEGREE SWING

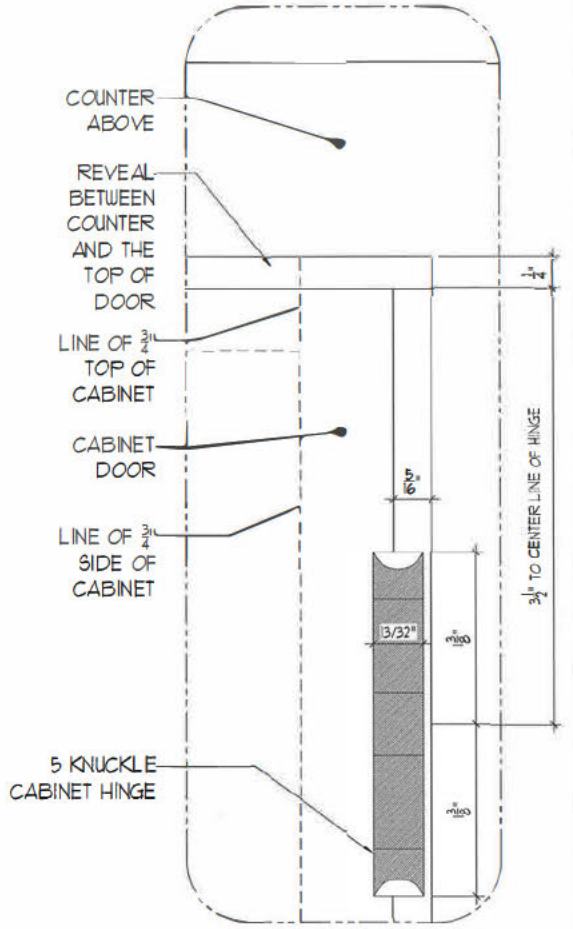

[redacted]


[redacted]

HARDWARE
96mm WIRE PULLS



GENOTHEN STANDARD WIRE PULL

OVERALL LENGTH	4" (96mm O.C.)
FINISH	US 26D BRUSHED CHROME
DIAMETER	5/16"
FINGER CLEARANCE	1"
PROJECTION	1-5/16"

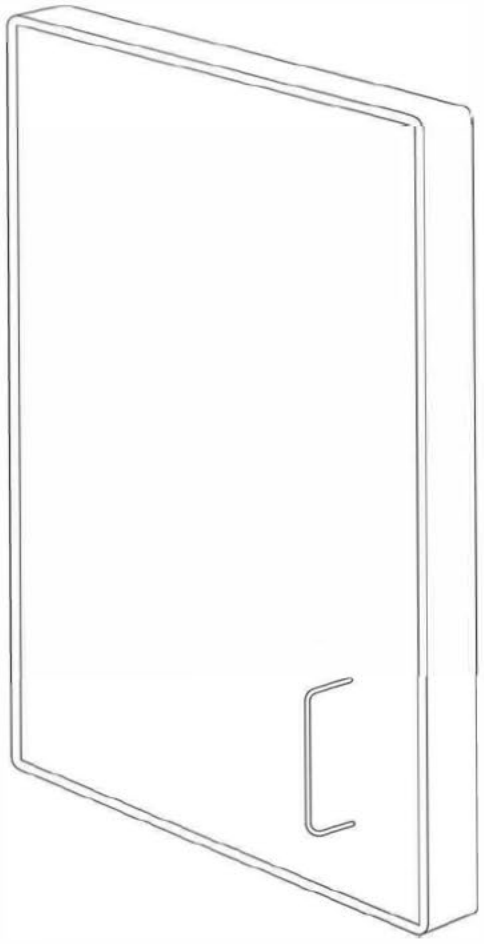

[redacted]


ENGINEERED PRODUCTS CO.
Architectural & Functional Hardware Products

EPCO 592 MAGNETIC CATCH

THIS HEAVY DUTY MAGNETIC CATCH FOR LARGER CABINET DOORS FEATURES AN ALUMINUM CASE THAT IS SELF-ALIGNING TO STRIKE PLATE AND A LIFETIME MAGNET. IDEAL FOR INSTITUTIONAL AND COMMERCIAL APPLICATIONS.

MANUFACTURER: EPCO
COLOR/FINISH: ALUMINUM
TYPE: MAGNETIC CATCH
ONE CATCH NEEDED FOR EACH DOOR

SPECIFICATIONS:
BODY LENGTH: 1 IN.(25MM)
BODY WIDTH: 2-1/16IN.(52MM)
BODY PROJECTION: 47/64IN.(19MM)
PULL RATING: 12lb.

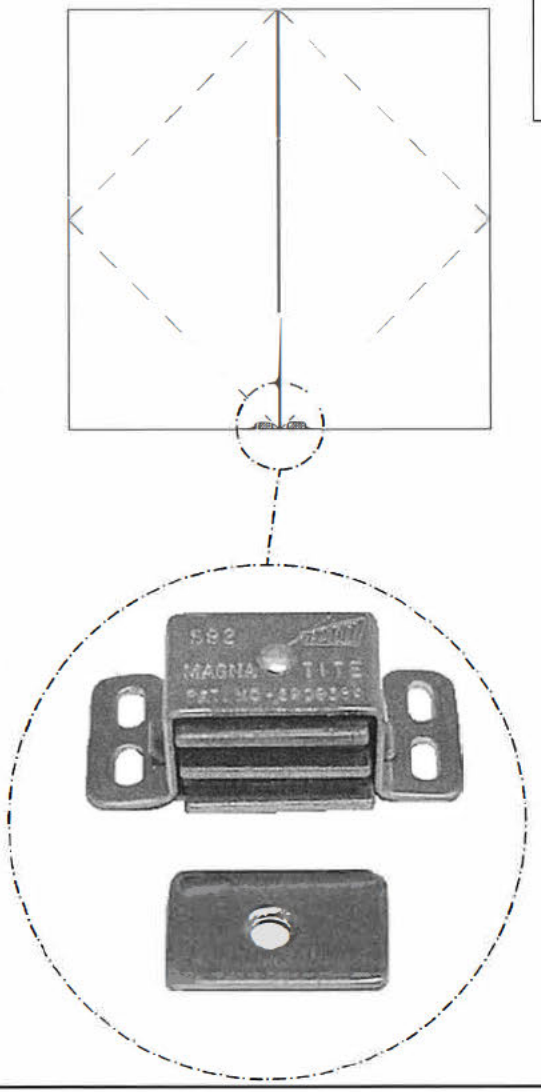


BHMA COMPLIANT
COMPLIANT WITH ANSI/BHMA A156.9 B01371 GRADE 1

PAGE: H3
DRW:
CHK:
SCALE:
REV:

HARDWARE
EPCO
592 MAGNETIC CATCH


[redacted]

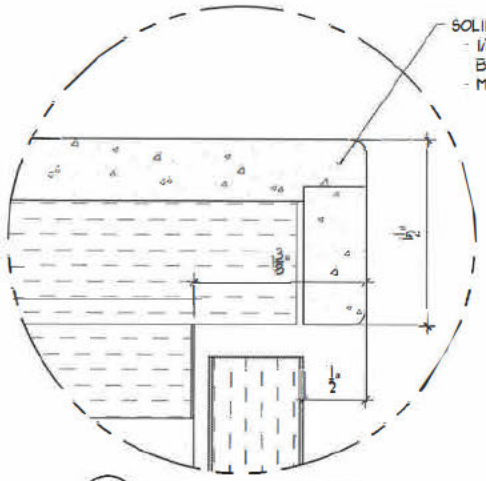

A / D1 GENOTHEN TYP COUNTER EDGE | FULL SIZE

OWNER NOTE: PLEASE PROVIDE THE CUTSHEET FOR THIS SINK AND ITS FAUCET THIS INFORMATION IS CRITICAL FOR CUTOUT IN THE SOLID SURFACE COUNTERTOP

See Attached

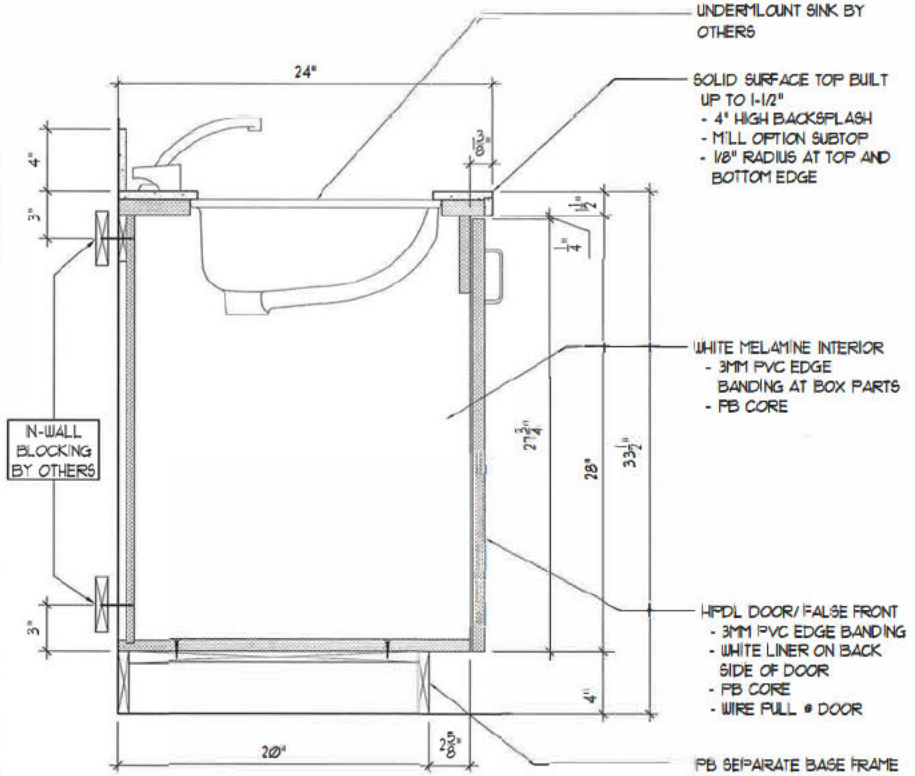



A / D1 TYPICAL SINK CABINET | 1-1/2" = 1'-0" | TO MATCH PG 01 A PREVIOUS PROJECT

PAGE: D1
ID: 2432
DRW: SLT
DATE: 9/24/24
CHK: LKE
SCALE: U.N.O. 3/8" = 1'-0"
REV SHOPS ID & DATE:

#13873
SOUTH KING FIRE STATION 63
33414 21ST AVE SW FEDERAL WAY, WA 98003

[redacted]

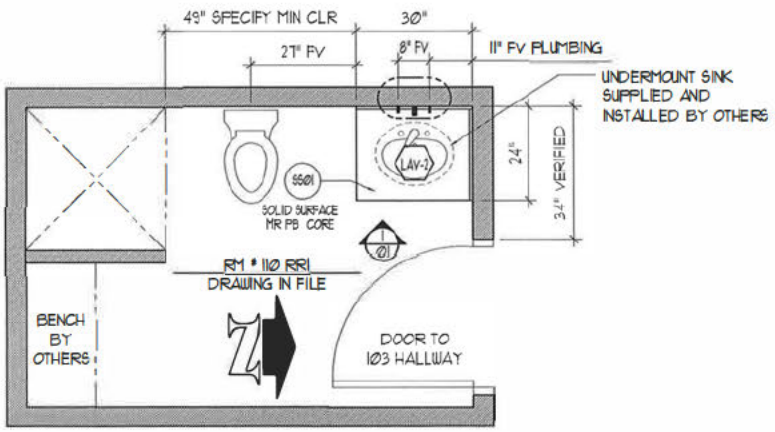

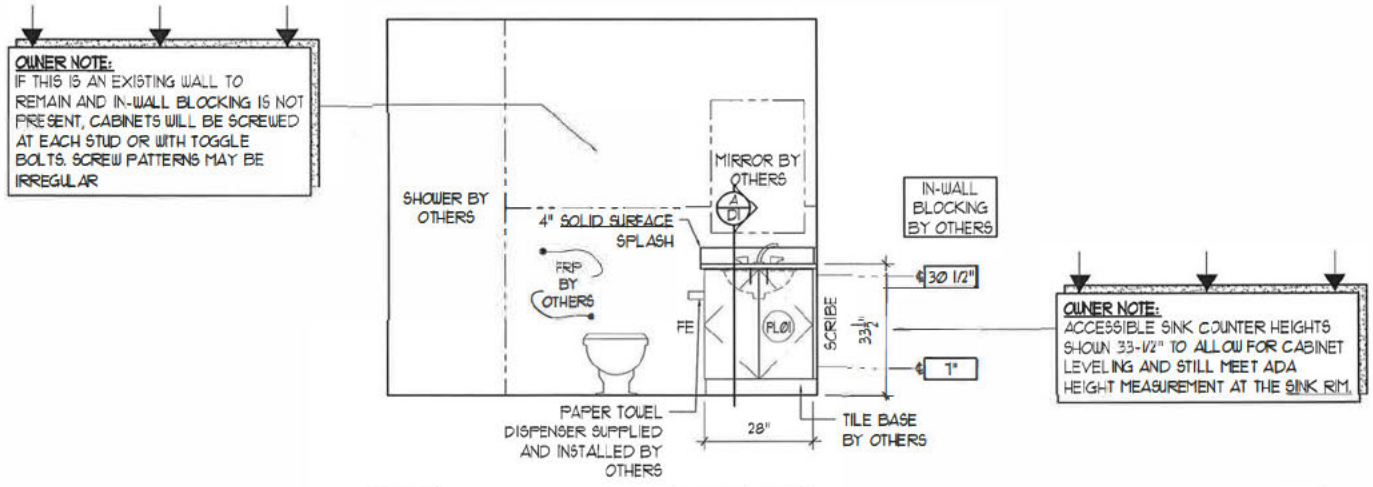


1	RM# 110 RRI	TO	MATCH A
01	WALL DIR. WEST	PREVIOUS	PROJECT


PAGE: 01
ID: 2432
DRW: SLT
DATE: 9/24/24
CHK: LKE
SCALE: U.N.O. 3/8" = 1'-0"
REV SHOPS ID & DATE:

#13813
SOUTH KING FIRE STATION 63
33414 21ST AVE SW FEDERAL WAY, WA 98003

[redacted]

[redacted]

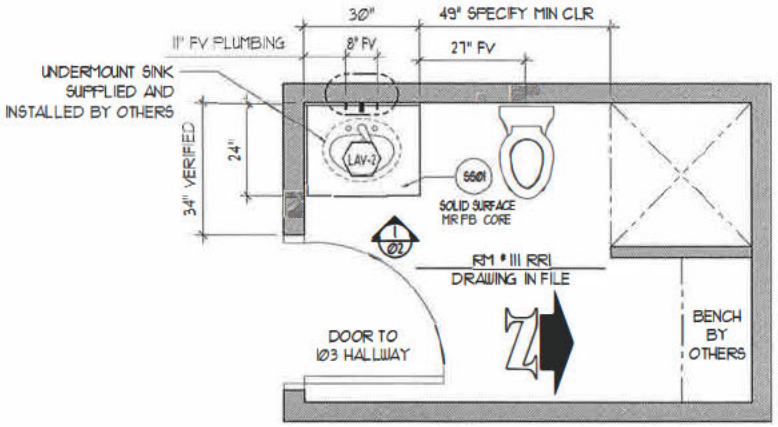

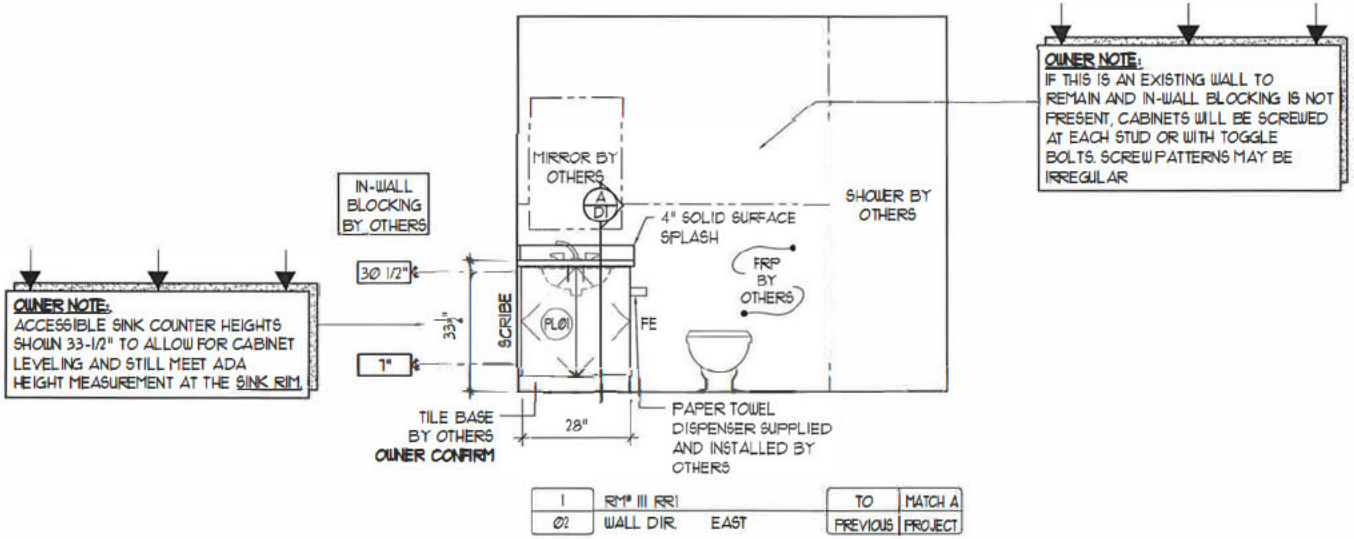



1	RM# 111 RR1	TO	MATCH A
Ø2	WALL DIR. EAST	PREVIOUS	PROJECT

PAGE: Ø2
ID: 2432
DRW: SLT
DATE 9/24/24
CHK: LKE
SCALE: U.N.O. 3/8" = 1'-Ø"
REV SHOPS ID & DATE:

#13813
SOUTH KING FIRE STATION 63
33414 21ST AVE SW FEDERAL WAY, WA 98003

[redacted]

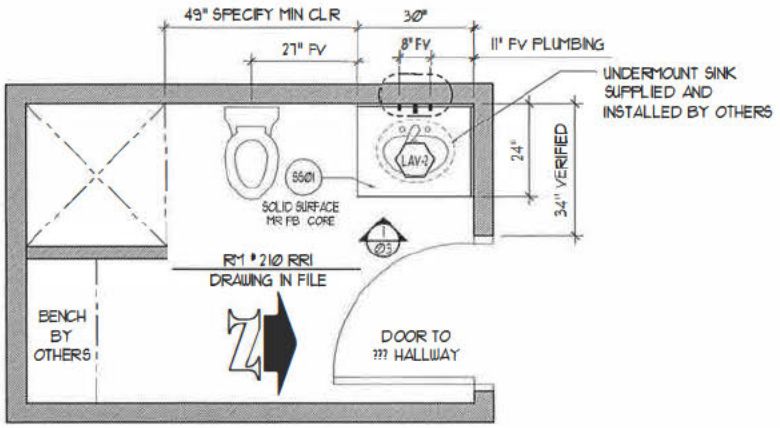

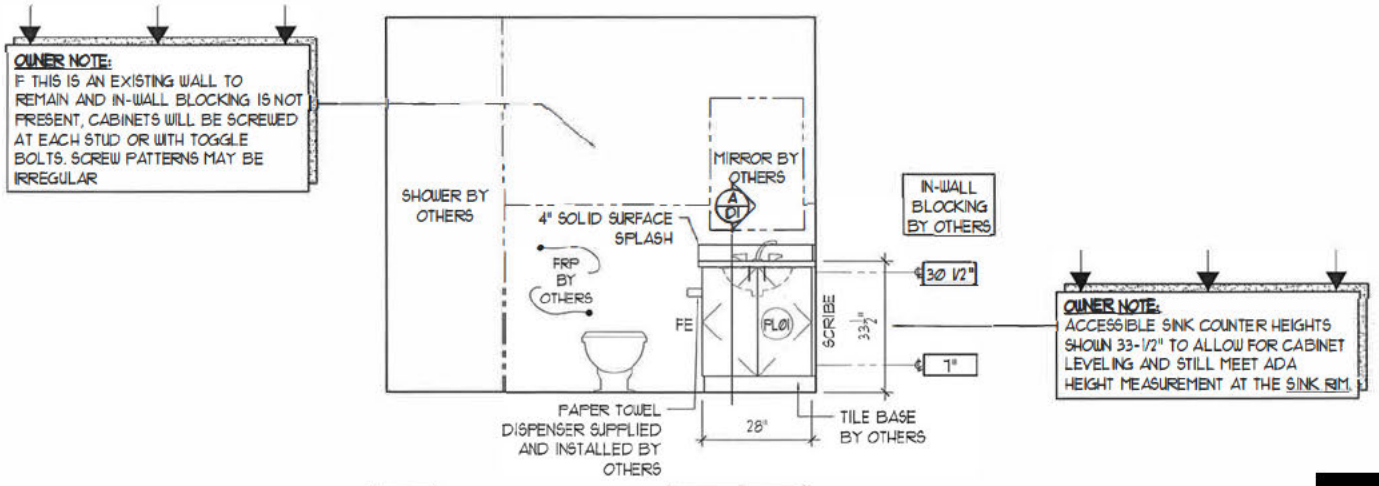

1	RM# 210 RRI	TO	MATCH A
Ø3	WALL DIR WEST	PREVIOUS	PROJECT


[redacted]


PAGE: Ø3
ID: 2432
DRW: SLT
DATE: 9/24/24
CHK: LKE
SCALE: U.N.O. 3/8" = 1'-Ø"

REV SHOPS ID & DATE:

#13873
SOUTH KING FIRE STATION 63
33414 21ST AVE SW FEDERAL WAY, WA 98003

[redacted]

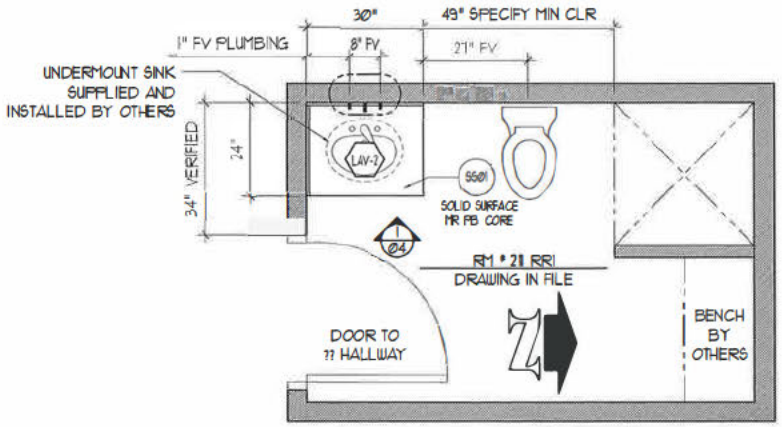

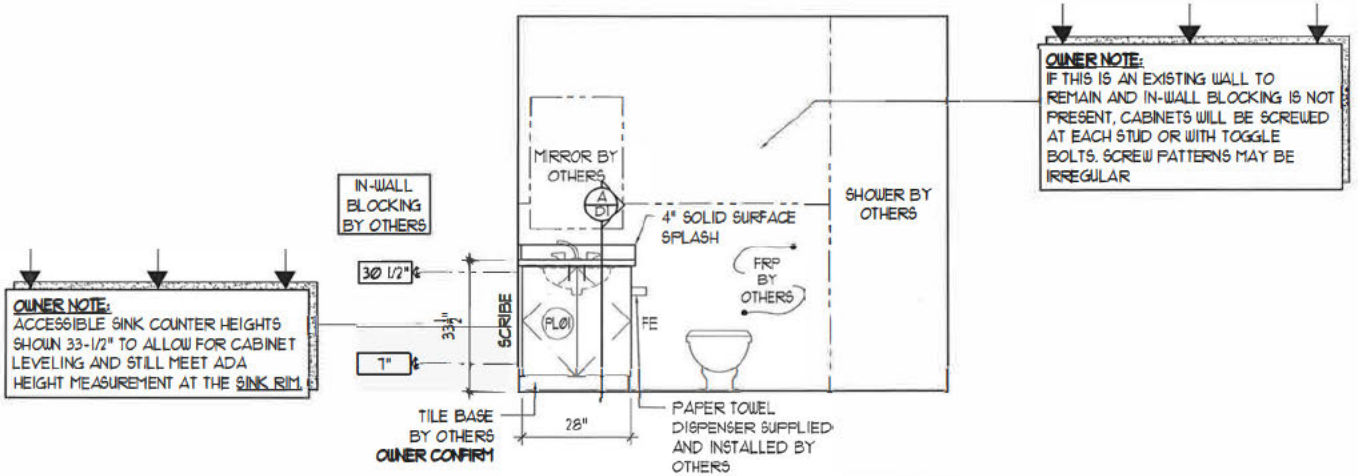

1	RM# 211 RRI	TO	MATCH A
Ø4	WALL DIR. EAST	PREVIOUS	PROJECT

PAGE: Ø4
ID: 2432
DRW: SLT
DATE: 9/24/24
CHK: LKE
SCALE: U.N.O.
3/8" = 1'-Ø"
REV SHOPS ID
& DATE:

#13873
SOUTH KING FIRE STATION 63
33414 21ST AVE SW FEDERAL WAY, WA 98003


[redacted]

[redacted]

VITREOUS CHINA - LAVATORY
OVAL UNDERMOUNT

Caitlin

19.8" X 17.7"

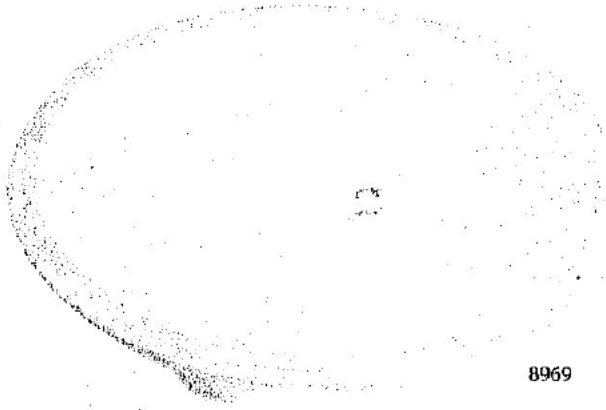


8969

FEATURES:

- Concealed Front Overflow
- Includes Installation Clips
- Available in White, Bone and Biscuit
- AAA Grade Quality Glazed Finish
- Five Year Product Warranty
- Meets ASME A112.19.2-2003 & IAPMO/ANSI UPC 1-2003
- Meets CSA B45.0-02, B45.1-02 & B45S1-04

Specifications			
Model No.	Description	Approx Wt.	Gross Cu. Ft.
L1560	Bristol 19.8" Oval Undermount Lavatory	17.64 lbs.	1.624 cu. ft.

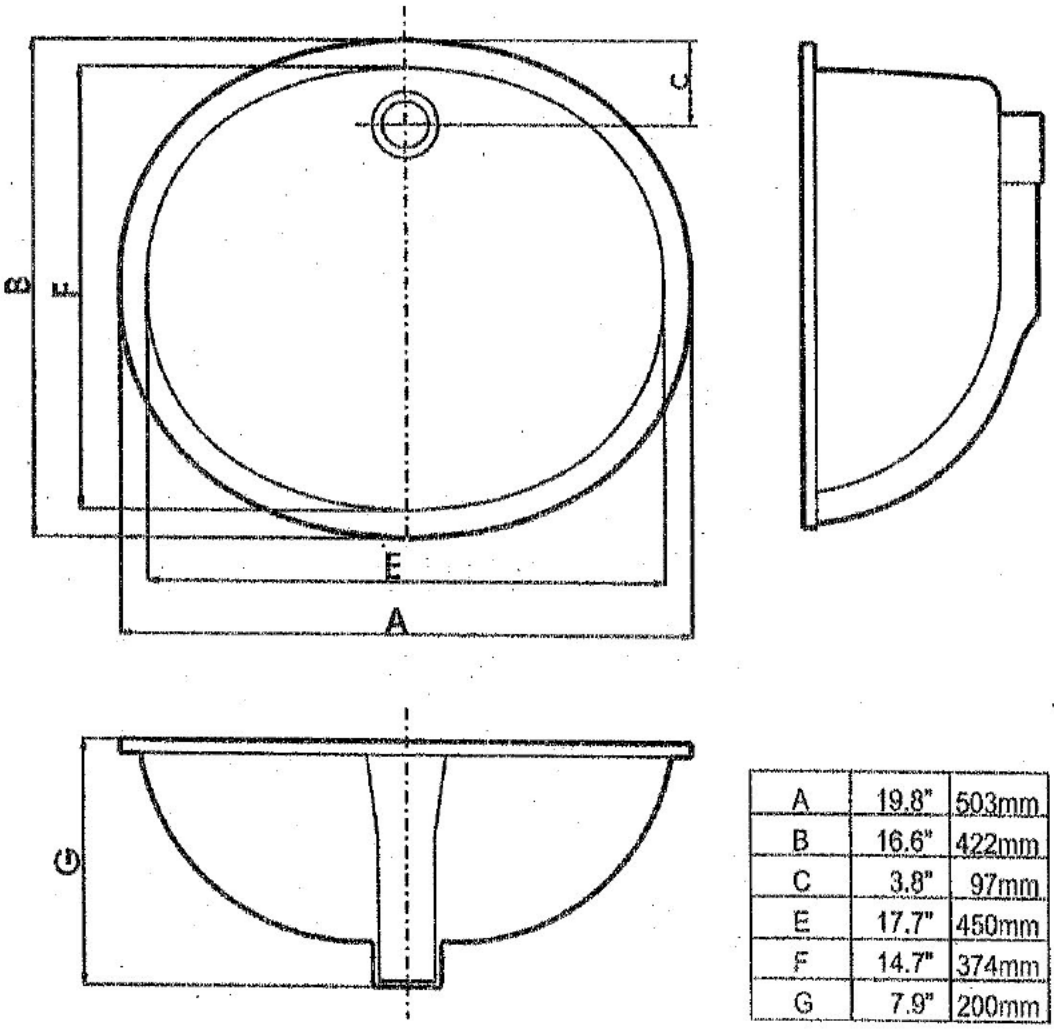

A	19.8"	503mm
B	16.6"	422mm
C	3.8"	97mm
E	17.7"	450mm
F	14.7"	374mm
G	7.9"	200mm


Exclusively from Keller Supply

MOEN

Buy it for looks. Buy it for life.®

Specifications

There is more than 1 version of this model.
Page down to identify the version you have.

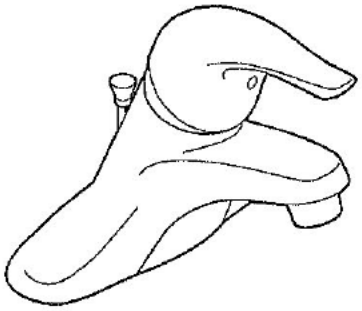

CHATEAU®
Single-Handle Lavatory Faucet

with Metal Waste Assembly
Models: L4621 series

Bulk Pack Models (12 Per Carton):
L64620 series

with 50/50 Waste Assembly
Bulk Pack Model (12 Per Carton): L64621 series

Less Waste
Model: L4601 series

Bulk Pack Model (12 Per Carton):
L64601series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

DESCRIPTION
- Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- Includes metal or 50/50 pop-up type waste assembly where noted


OPERATION
- Pivot action lever style handle
- Temperature controlled through 100° degree arc of handle travel

FLOW
- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
  - 1.2 gpm max (4.5L/min) at 60 psi
  - 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE
- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and stainless steel material

STANDARDS
- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA** for lever handle

WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

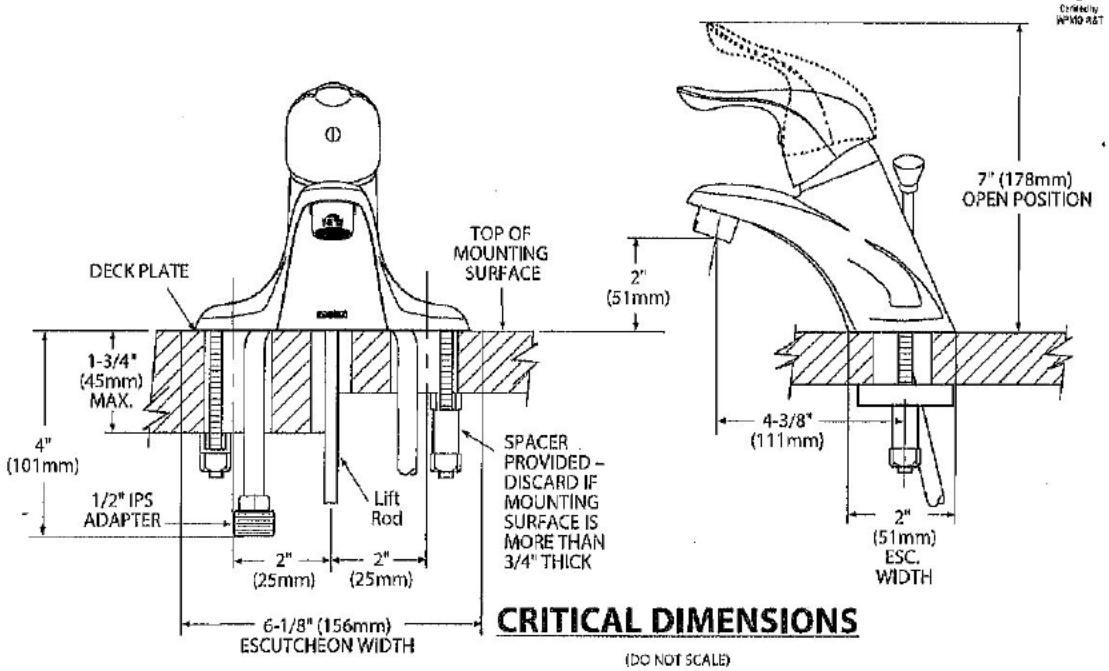

CRITICAL DIMENSIONS

(DO NOT SCALE)

Rev. 1/16

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN
www.moen.com